



HIOKI

CLAMP ON POWER LOGGER

PW3360-20

Power Measuring Instruments




Handy and Easy to Use – Power Management Support



Now with
QUICK SET
Convenience

Reliable measurements start with proper wiring.

The **QUICK SET** function guides you in making the right connections.



- Supports single to three-phase, 4-wire circuits
 - Simultaneously measure up to three single-phase, 2-wire circuits (in the same power system).
- Measure up to 780V with a 1000V display range
- Broadly applicable for many jobs, including leakage current measurement
 - An optional clamp-on leakage sensor supports measurements as low as 50 mA.
- Store months of data on SD cards



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091



www.hioki.com

Hioki company overview, new products, environmental considerations and other information are available on our website.



Begin with QUICK SET Convenience

Select your Wiring Type, Clamp and Destination, and Connect


Select wiring type (example: 3P4W) and connect

1 Connect the leads to the PW3360-20.



Make proper connections simply by observing the colors of the displayed leads.

2 Connect the voltage clips.




PASS

Double checks your voltage input and phase

Proceed to the next step when PASS appears.

3 Connect the clamp sensors.




Select the current range



FAIL

If FAIL appears, move the cursor to the indicator and press the [ENTER] key.

Corrective action tips appear




Create a Graph to Clearly Grasp Power Consumption



Record power consumption on an SD Card* at specific intervals. Load the data into the PC.

Use Excel graph processing for before and after comparisons.

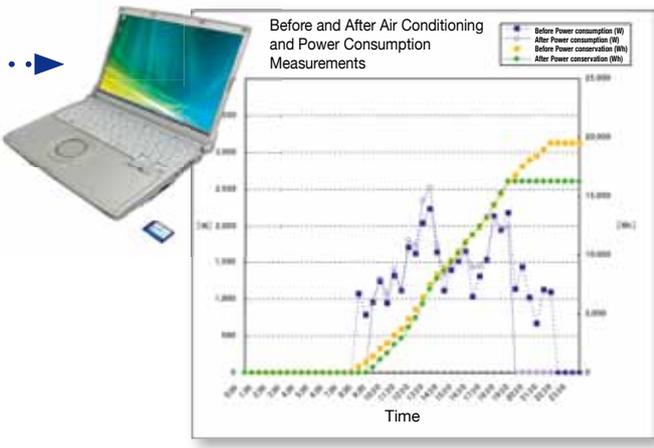

* Store up to one year's data acquired at one minute intervals. Performance cannot be guaranteed on storage media other than Hioki-specified SD card options.

Suits a Variety of Worksites

Where no AC power is available

Battery* power provides about eight hours of continuous operation. In addition, a **Voltage Line Power Adapter*** is available to power the PW3360-20 from the measurement lines.

* Battery Set PW9002 and Voltage Line Power Adapter PW9003 options are sold separately.



Battery Set PW9002

In severe temperature environments

The operating temperature range extends from **-10°C (14°F) to 50°C (122°F)**. Even under battery operation, measurements can be performed from 0 °C (32°F) to 40°C (104°F) (0°C (32°F) to 50°C (122 °F) when using LAN communication).

Fits in tight spaces



Magnetic voltage adapters for hard-to-clip terminals

Magnetic voltage adapters convertible with the Voltage Cords L9438-53 let you accurately detect voltage when the circuit terminals are too shallow for alligator clips to latch on.

* Magnetic Adapter 9804 option sold separately.




Generally compatible with M6 pan screws

Loaded with More Useful Functions


Simultaneous Measurements

Simultaneously measures three single-phase 2-wire circuits in the same system.



Pulse Input

The **pulse input function** can be used to record power data and production volume counts simultaneously. The power data and pulse volume (production volume) information are **useful for unit cost production management**.

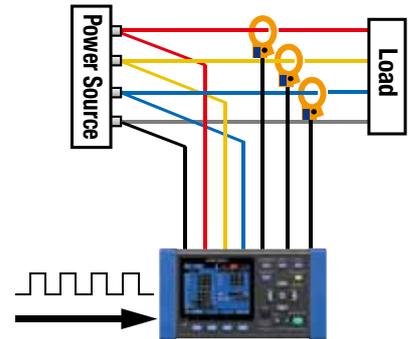

Leakage Current Measurement

As a 3-channel Leakage Current Logger

With the optional leakage current clamp on sensors, turn the instrument into a 3-channel leakage current logger to help identify trouble spots.

Options Leak Clamp on Sensor


9675



9657-10



Ideal for quick investigation of intermittent leakage by continuous calculation processing every 200 ms. (Select to save the average, maximum and/or minimum at every interval.)

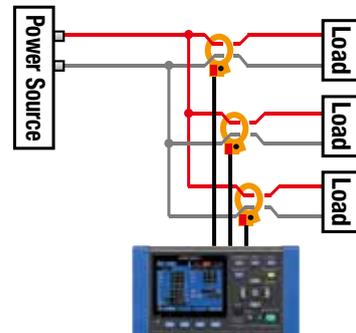


Useful Tip

Demand/Time Series Graph Displays

(Demand Graph Display Example)

This function will be supported from version 2.00.

Demand graphs at specified times and power time series graphs can be displayed on the color LCD. Observing on-site power fluctuations is useful for confirming energy saving and related effects.




Efficient Power Management by Remote Measuring and PC Processing

Remote Monitor

HTTP Server Function

Use a LAN cable to connect the PW3360-20 to a personal computer for real-time remote monitoring and measurement display in a web browser.

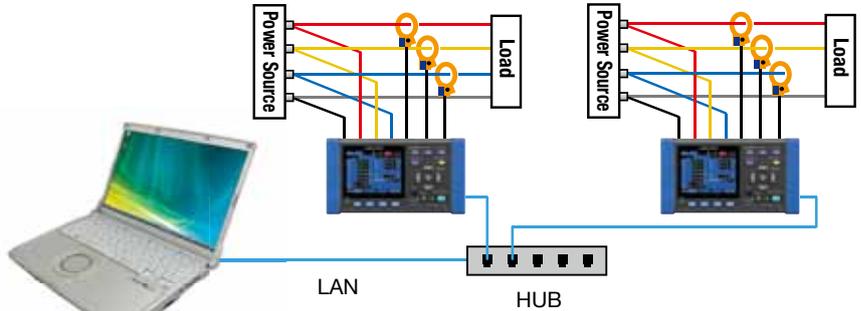

Files recorded in the PW3360-20 internal memory or SD card are accessible by LAN or USB connection, and are downloadable using the free **PW3360 Setup and Download Software**.

PC Processing


Power Logger Viewer SF1001 (option, sold separately)

Data saved to an SD card or internal memory can be loaded into a PC for expanded display, aggregation and analysis.

On the same time axis, view measured power consumption and equipment operating status at specific intervals, along with equipment characteristics and management details.


Stacked Graph Display Example

Use the [Stacked Display] to confirm at a glance comparative power consumption at multiple locations simultaneously.

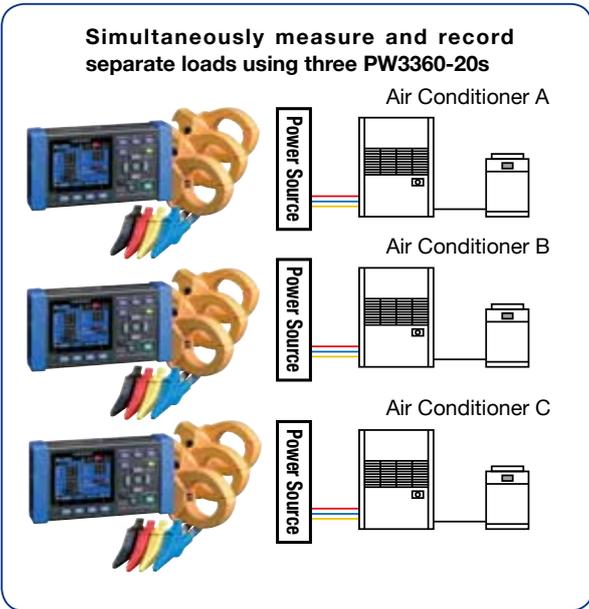

Freeware for Model PW3360-20 (free download from Hioki's website)


PW3360 Excel Graph Auto-Creation Software

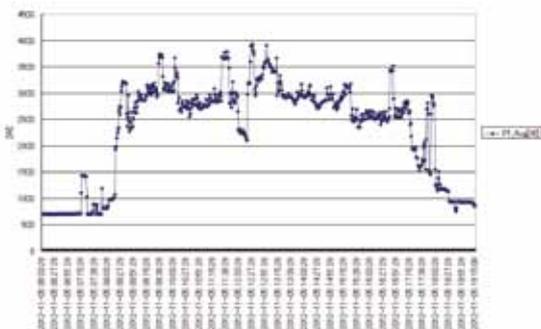

Install the PW3360 Excel Graph Auto-Creation Software to create graphs in Excel automatically using recorded measurement data.

PW3360 Setup and Download Software

Use with a LAN or USB connection to download data recorded in the PW3360-20's internal memory or SD Card to a PC, and to change instrument settings from the PC.

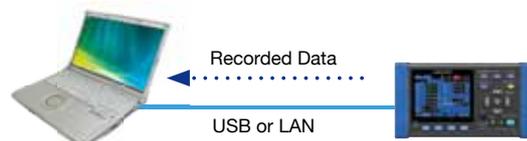

PW3360-20 Specifications (product guaranteed for one year)

| Input specifications | |
|--|--|
| Measurement line type | Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire |
| Measurement line Frequency | 50/ 60 Hz |
| Number of input channels | Voltage: 3 channels U1 to U3 Current: 3 channels I1 to I3 |
| Voltage range | 600 V AC (single range) |
| | Total display area: 5V to 1000 V (less than 5 V displays as 0 V) |
| | Effective measurement range: 90 V to 780 V, peak: $\pm 1400V$ [OVER] indicates over-range warning |
| Current ranges | Load current |
| | CLAMP ON SENSOR 9694 : 500m/1/5/10/50 A |
| | CLAMP ON SENSOR 9695-02 : 500m/1/5/10/50 A |
| | CLAMP ON SENSOR 9660 : 5/10/50/100 A |
| | CLAMP ON SENSOR 9695-03 : 5/10/50/100 A |
| | CLAMP ON SENSOR 9661 : 5/10/50/100/500 A |
| CLAMP ON SENSOR 9669 : 100/200/1k A | |
| FLEXIBLE CLAMP ON SENSOR CT9667 : 500/5k A | |
| | Leakage current |
| LEAK CLAMP ON SENSOR 9657-10 : 50m/100m/500m/1/5 A | |
| LEAK CLAMP ON SENSOR 9675 : 50m/100m/500m/1/5 A | |
| | Total display range: Within 0.4 to 130% of the range (zero is suppressed for less than 0.4%) |
| | Effective measurement range: Within 5 to 110% of the range peak: $\pm 400\%$ of range, however, maximum range is 200%. [OVER] indicates over-range warning |
| Power ranges | 300.00 W to 9.0000 MW |
| | Depends on voltage/current combination and measured line type (see Measurement Range Configuration Tables) |
| | Total display range: Within 0 to 130% of the range ("0W" display indicates zero rms voltage and/or current) Effective measurement area: Within 5 to 110% of the range |
| VT ratio settings | Any (0.01 to 9999.99) Selections (1/60/100/200/300/600/700/1000/2000/2500/5000) |
| CT ratio settings | Any (0.01 to 9999.99) Selections (1/40/60/80/120/160/200/240/300/400/600/800/1200) |
| Input methods | Voltage: Insolated inputs (except between U1, U2, U3 and N) Current: Insolated input using a clamp-on sensor |
| Input resistance | Voltage input part: 3 M Ω $\pm 20\%$ (50/ 60 Hz) |
| Maximum rated voltage between terminals | Voltage input section: 1000 VAC, 1400 Vpeak Current input section: 1.7 VAC, 2.4 Vpeak |
| Maximum rated voltage to earth | Voltage input section: 600V Measurement Category III 300V Measurement Category IV Current input section: Depends on clamp sensor in use. |

| General specifications | |
|--|--|
| Display device | 3.5 inch TFT color LCD (320 \times 240 pixel) Japanese, English (supported from version 1.50), Chinese (Simplified, supported from version 2.00) Backlight auto-off function (after 2 minutes) |
| Operating environment | Indoors, Pollution degree 2, altitude up to 2000 m (6562-ft.) |
| Operating temperature and humidity (no condensation) | -10°C to 50°C (14°F to 122°F), 80% RH or less During LAN communication: 0°C to 50°C (32°F to 122°F), 80% RH or less During battery operation: 0°C to 40°C (32°F to 104°F), 80% RH or less During battery charging: 10°C to 40°C (50°F to 104°F), 80% RH or less |
| Storage temperature and humidity (no condensation) | -20°C to 60°C (-4°F to 140°F), 80% RH or less However, the battery's storage temperature range is -20°C to 30°C (-4°F to 86°F), 80% RH or less |
| Dielectric strength | 4.29 kVrms AC (1 mA sense current) between voltage input terminals and external terminals, 50/ 60 Hz for 60 sec. |
| Applicable standards | Safety: EN61010, EMC: EN61326, EN61000-3-2, EN61000-3-3 |
| Power supply | •Z1006 AC Adapter (12 V, 1.25 A), Rated supply voltage 100 VAC to 240 VAC, Rated power supply frequency 50/60 Hz •Model 9459 Battery Pack (Ni-MH DC7.2 V 2700 mAh) |
| Charge function | Charges the battery regardless of whether the instrument is on or off. Charge time: Max. 6 hr. 10 min. (reference value at 23°C) |
| Maximum rated power | •When the Z1006 AC Adapter is used: 40 VA (including AC adapter), 13 VA (PW3360-20 instrument only) •When the 9459 Battery Pack is used: 3 VA |
| Continuous battery operation time | Approx. 8 hr. (Continuous, backlight off) (when using the battery pack) |
| Backup battery life | Clock and settings (Lithium battery), Approx. 10 years @23°C (@73.4°F) |
| Dimensions | Approx. 180W(7.09") \times 100H(3.94") \times 48D(1.89") mm (without PW9002) Approx. 180W(7.09") \times 100H(3.94") \times 68D(2.68") mm (with PW9002) |
| Mass | Approx. 550g (19.4 oz) (without PW9002), Approx. 830g (29.3 oz) (with PW9002) |
| Accessories | Voltage Cord L9438-53(1 set), AC Adapter Z1006(1), USB cable(1), instruction manual (1), measurement guide (1), color spiral tubes (1 set): red, yellow, blue/two each, for color-coding clamp sensors, spiral tubes for grouping clamp sensor cords (5) |

Accuracy guarantee period: One year 23°C $\pm 3^\circ\text{C}$, 80%RH or less, (no condensation)

| Measurement specifications | |
|---|--|
| Connection | Single-phase 2-wire (1P2W, 1P2W \times 2 circuits, 1P2W \times 3 circuits) Single-phase 3-wire (1P3W, 1P3W+I, 1P3W1U, 1P3W1U+I) Three-phase 3-wire (3P3W2M, 3P3W2M+I, 3P3W3M) Three-phase 4-wire (3P4W), Current only: 1 to 3 channels |
| Simultaneous power/current measurement modes | 1P3W+I: 1 power circuit and 1 current channel 3P3W2M+I: 1 power circuit and 1 current channel |
| Measurement items | Voltage RMS, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (U1), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power (with lag/lead display), apparent power, power factor (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration), reactive energy (consumption, regeneration), electricity rate display (by means of planned future function update), active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand, pulse input |
| Calculation selection | Power factor, reactive and apparent power: rms calculation/fundamental wave calculation |
| Measurement accuracy (50/ 60Hz, power factor = 1) | Voltage: $\pm 0.3\%$ rdg. $\pm 0.1\%$ f.s. Current: $\pm 0.3\%$ rdg. $\pm 0.1\%$ f.s. + clamp sensor accuracy Active power: $\pm 0.3\%$ rdg. $\pm 0.1\%$ f.s. + clamp sensor accuracy Clamp-On Sensor 9661 accuracy: $\pm 0.3\%$ rdg. $\pm 0.01\%$ f.s. (Accuracy depends on clamp sensor. See page 6 for the accuracy of each model, and page 7 for combined accuracy of Model PW3360-20 and each clamp sensor.) |
| Display update rate | Approx. 0.5 sec (except when accessing SD card or internal memory, or during LAN/USB communication) |
| Measurement method | Digital sampling and zero cross synchronization calculation method Sampling: 10.24 kHz (2048 points) Calculation processing 50 Hz: Continuous, gapless measurement at 10 cycles 60 Hz: Continuous, gapless measurement at 12 cycles |
| A/D converter resolution | 16bit |

| Recording specifications | |
|--------------------------|---|
| Save destination | SD Card, internal memory (capacity: approx. 320 KB) |
| Save interval time | 1/2/5/10/15/30 seconds, 1/2/5/10/15/20/30/60 minutes * Available storage time is displayed on PW3360-20's setting screen |
| Save items | Measurement save: Average only / all (average, maximum, minimum) Screen copy: ON/OFF (Saves the displayed screen as a BMP at a fixed interval.) The minimum interval time for saving screen copies is 5 min. If the setting is less than 5 min., screen copies will be saved every 5 min. Waveform save: Stores binary waveform data (with shortest interval 1 minute) Supported from version 2.00 |
| Recording start methods | Interval time, manual, or at specified time |
| Recording stop methods | Manual, or at specified time (up to one year) |

| Pulse input | |
|----------------------|---|
| Input specifications | No-voltage contact input (counts when shorted terminals open) Voltage input (Hi: 2 V to 45 V, Lo: 0 V to 0.5 V, counts at Lo to Hi) Maximum rated input between terminals: 45 V DC Maximum rated input to ground: not isolated (GND is equipment common) |
| Measurement range | 0 to 9999 (maximum pulse count per save interval) |
| Filter | Filter On (for mechanical contacts) 25 Hz or less, and at least 20 ms Hi and Lo pulse width Filter Off (for solid-state contacts) 5 kHz or less, and at least 100 μs Hi and Lo pulse width |
| Scaling | Displays product of pulse count and scaling factor setting Setting ranges: 0.001 to 1.000, and 1.000 to 100.00 |

| Pulse output | |
|---------------|---|
| Function | Output pulse rate is proportional to active power consumption (WP+) when measuring integral power consumption |
| Pulse rate | OFF/1Wh/10Wh/100Wh/1kWh/10kWh/100kWh/1000kWh (Default: 1 kWh) |
| Pulse width | approx. 100 ms |
| Output signal | Open-collector 30 V, 5 mA max (photocoupler isolated) Active Low |

| External interfaces Specifications | |
|------------------------------------|---|
| SD card Interface | Settings data, measurement data, screen data Waveform data (support planned from version 2.00) |
| LAN interface | 10BASE-T/100BASE-TX IEEE802.3 Compliance - HTTP server function - Download settings and data by communication application program |
| USB interface | USB Ver 2.0, Windows 7 (32/64bit) / Vista (32bit) / XP - When connected to a computer, the SD Card and internal memory are recognized as removable storage devices. - Download settings and data by communication application program |

POWER LOGGER VIEWER SF1001 Specifications

General Specifications

| | |
|--------------------------------------|--|
| Read-compatible model | PW3360-20 |
| Supported computer operating systems | Windows 7 SP1 or later (32/64bit) Windows Vista SP2 or later (32bit) Windows XP SP3 or later (32bit) |



Functions Specifications


| | |
|------------------------------------|--|
| Time series graph display function | Display items: Voltage, current, active power, reactive power, apparent power, power factor, frequency, integrated active power, integrated reactive power, demand volume, demand value, voltage disequilibrium factor, pulse *Measurement values can be displayed by the cursor Stacked bar graph display: Up to 16 types of data series can be displayed in an overlay graph |
| Summary display function | Displayed items are the same as for Time Series Graph Display - Display and totalize monthly/weekly/daily reports for specified period - Calculate load factor and demand factor for daily/weekly/monthly reports, and displays results - Hourly totalization (up to four segments) |
| Copy function | Captures any display image to the clipboard |
| Print function | Preview and print content shown on the time series graph, report, and settings displays. Comment entry (Text comments can be entered in any printout) Printing support: Any color or monochrome printing supported by the operating system |
| Report printing | Print (static) contents over a specific time period |

CLAMP SENSOR Specifications

CLAMP ON SENSOR

| | 9694 | 9660 | 9661 | 9669 | 9695-02 | 9695-03 |
|---|---|---|---|--|--|--|
| Appearance |  CE Cord length: 3 m (9.84ft) |  CE Cord length: 3 m (9.84ft) |  CE Cord length: 3 m (9.84ft) |  CE Cord length: 3 m (9.84ft) |  CE |  CE |
| Measurable conductor diameter | φ15mm (0.59") | φ15mm (0.59") | φ46mm (0.81") | φ55mm (2.17"), 80 (3.15")×20 (0.79")mm | φ15mm (0.59") | φ15mm (0.59") |
| Primary current rating | 5A AC | 100A AC | 500A AC | 1000A AC | 50A AC | 100A AC |
| Accuracy | Amplitude (45 to 66 Hz) | ±0.3% rdg. ±0.02% f.s. | ±0.3% rdg. ±0.02% f.s. | ±0.3% rdg. ±0.01% f.s. | ±1.0% rdg. ±0.01% f.s. | ±0.3% rdg. ±0.02% f.s. |
| | Phase (45 Hz to 5 kHz) | Within ±2° | Within ±1° | Within ±0.5° | Within ±1° | Within ±2° |
| Frequency characteristic 40Hz to 5kHz (deviation from accuracy) | Within ±1.0% | | | Within ±2.0% | Within ±1.0% | |
| Effect of external magnetic field (with a magnetic field of 400 A/ m AC) | Equivalent to 0.1 A or less | | | Equivalent to 1 A or less | Equivalent to 0.1 A or less | |
| Effect of conductor position | Within ±0.5% | | | Within ±1.5% | Within ±0.5% | |
| Maximum rated voltage to earth | CAT III 300Vrms | CAT III 300Vrms | CAT III 600Vrms | CAT III 600Vrms | CAT III 300Vrms | |
| Maximum input (45 to 66Hz) | 50 A continuous | 130 A continuous | 550 A continuous | 1000 A continuous | 60 A continuous | 130 A continuous |
| Dimensions | 46W (1.81") × 135H (5.31") × 21D (0.83") mm | 46W (1.81") × 135H (5.31") × 21D (0.83") mm | 77W (3.03") × 151H (5.94") × 42D (1.65") mm | 99.5W (3.92") × 188H (7.40") × 42D (1.65") mm | 50.5W (2.28") × 58H (2.28") × 18.7D (0.74") mm | |
| Mass | 230g (8.1 oz) | 230g (8.1 oz) | 380g (13.4 oz) | 590g (20.8 oz) | 50g (1.8 oz) | |

FLEXIBLE CLAMP ON SENSOR

| | CT9667 | |
|---|--|-----------------------|
| Appearance |  CE Cord length: 2 m (6.56ft) Sensor - circuit: 2 m (6.56ft) Circuit - connector: 1 m (3.28ft) | |
| Measurable conductor diameter | φ254mm | |
| Primary current rating | 500A AC/5,000A AC | |
| Accuracy (45 to 66Hz) | Amplitude | ±2.0% rdg. ±0.3% f.s. |
| | Phase | Within ±1° |
| Frequency characteristic 10Hz to 20kHz (deviation from accuracy) | Within ±3 dB | |
| Effect of external magnetic field (with a magnetic field of 400 A/ m AC) | 1.5% / f.s. or less. | |
| Effect of conductor position | Within ±3.0% | |
| Maximum rated voltage to earth | CAT III 1000Vrms, CAT IV 600Vrms | |
| Maximum input (45 to 66Hz) | 10000 A continuous | |
| Dimensions | Circuit box: 35W (1.38") × 120H (4.74") × 34D (1.34") mm | |
| Mass | 470g (16.6 oz.) (Sensor + Circuit Box, w/battery) | |
| Power supply | LR06 alkaline battery × 2 (continuous operation max. 7 days) or AC ADAPTER 9445-02/9445-03 (optional) | |

CLAMP ON LEAK SENSOR (Leakage Current Measurement Only)

| | 9657-10 | 9675 |
|---|--|--|
| Appearance |  CE Insulated conductor Cord length: 3 m (9.84ft) |  CE Insulated conductor Cord length: 3 m (9.84ft) |
| Measurable conductor diameter | φ40mm (1.57") | φ30mm (1.18") |
| Primary current rating | 10A AC* | 10A AC* |
| Accuracy | Amplitude (45 to 66 Hz) | ±1.0% rdg. ±0.05% f.s. |
| | Phase angle (60 or 60 Hz) | Within ±3° |
| Frequency characteristic 40Hz to 5kHz (deviation from accuracy) | Within ±5% | Within ±5% |
| Effect of external magnetic field (with a magnetic field of 400 A/ m AC) | 7.5 mA max. | 7.5 mA max. |
| Effect of conductor position | Within ±0.1% | Within ±0.1% |
| Maximum rated voltage to earth | CAT III 300Vrms | CAT III 300Vrms |
| Maximum input (45 to 66Hz) | 30 A continuous | 10 A continuous |
| Dimensions | 74W (2.91") × 145H (5.71") × 42D (1.65") mm | 60W (2.36") × 112.5H (4.43") × 23.6D (0.95") mm |
| Mass | 380g (13.4 oz) | 160g (5.6 oz) |
| Notes | Not used for power measurements | |

* Maximum AC measurement range with PW3360-20 is 5A.

Measurement Range Configurations

| Voltage | Connection | CLAMP ON SENSOR 9694 (CAT III 300V) *1 | | | | |
|----------|------------|--|-----------|-----------|-----------|-----------|
| | | CLAMP ON SENSOR 9695-02 (CAT III 300V) | | | | |
| | | 500.00 mA | 1.0000 A | 5.0000 A | 10.000 A | 50.000 A |
| 600.00 V | 1P2W | 300.00 W | 600.00 W | 3.0000 kW | 6.0000 kW | 30.000 kW |
| | 1P3W | 600.00 W | 1.2000 kW | 6.0000 kW | 12.000 kW | 60.000 kW |
| | 1P3W1U | | | | | |
| | 3P3W2M | | | | | |
| | 3P3W3M | | | | | |
| 3P4W | 900.00 W | 1.8000 kW | 9.0000 kW | 18.000 kW | 90.000 kW | |

*1. For the 9694 sensor, the range of guaranteed accuracy is from 500 mA to 5 A, and for the 9695-02, from 500 mA to 50 A.

| Voltage | Connection | CLAMP ON SENSOR 9660, 9695-03 (CAT III 300V) *2 | | | | |
|----------|------------|---|-----------|-----------|-----------|-----------|
| | | CLAMP ON SENSOR 9661 | | | | |
| | | 5.0000 A | 10.000 A | 50.000 A | 100.00 A | 500.00 A |
| 600.00 V | 1P2W | 3.0000 kW | 6.0000 kW | 30.000 kW | 60.000 kW | 300.00 kW |
| | 1P3W | 6.0000 kW | 12.000 kW | 60.000 kW | 120.00 kW | 600.00 kW |
| | 1P3W1U | | | | | |
| | 3P3W2M | | | | | |
| | 3P3W3M | | | | | |
| 3P4W | 9.0000 kW | 18.000 kW | 90.000 kW | 180.00 kW | 900.00 kW | |

*2. For the 9660 and 9695-03 sensors, the range of guaranteed accuracy is from 5 A to 100 A, and for the 9661, from 5 A to 500 A.

| Voltage | Connection | CLAMP ON SENSOR 9669 | | |
|----------|------------|----------------------|-----------|-----------|
| | | 100.00 A | 200.00 A | 1.0000 kA |
| 600.00 V | 1P2W | 60.000 kW | 120.00 kW | 600.00 kW |
| | 1P3W | 120.00 kW | 240.00 kW | 1.2000 MW |
| | 1P3W1U | | | |
| | 3P3W2M | | | |
| | 3P3W3M | | | |
| 3P4W | 180.00 kW | 360.00 kW | 1.8000 MW | |

| Voltage | Connection | FLEXIBLE CLAMP ON SENSOR CT9667 | |
|----------|------------|---------------------------------|-----------|
| | | 500.00 A | 5.0000 kA |
| 600.00 V | 1P2W | 300.00 kW | 3.0000 MW |
| | 1P3W | 600.00 kW | 6.0000 MW |
| | 1P3W1U | | |
| | 3P3W2M | | |
| | 3P3W3M | | |
| 3P4W | 900.00 kW | 9.0000 MW | |

| Leak current: CLAMP ON LEAK SENSOR 9657-10, 9675 | |
|--|---|
| Range | 50.000 mA/100.00 mA/500.00 mA/1.0000 A/5.0000 A |

Measurement accuracy

| | |
|--------------|--|
| Voltage | ±0.3% rdg. ±0.1% f.s. |
| Current | ±0.3% rdg. ±0.1% f.s. + clamp sensor accuracy |
| Active power | ±0.3% rdg. ±0.1% f.s. + clamp sensor accuracy (power factor = 1) |

Combined accuracy of PW3360-20 + clamp sensors

| Range | 9694 | 9695-02 |
|-----------|------------------------|------------------------|
| 50.000 A | — | ±0.6% rdg. ±0.12% f.s. |
| 10.000 A | — | ±0.6% rdg. ±0.2% f.s. |
| 5.0000 A | ±0.6% rdg. ±0.12% f.s. | ±0.6% rdg. ±0.3% f.s. |
| 1.0000 A | ±0.6% rdg. ±0.2% f.s. | ±0.6% rdg. ±1.1% f.s. |
| 500.00 mA | ±0.6% rdg. ±0.3% f.s. | ±0.6% rdg. ±2.1% f.s. |

| Range | 9660, 9695-03 | 9661 |
|----------|------------------------|------------------------|
| 500.00 A | — | ±0.6% rdg. ±0.11% f.s. |
| 100.00 A | ±0.6% rdg. ±0.12% f.s. | ±0.6% rdg. ±0.15% f.s. |
| 50.000 A | ±0.6% rdg. ±0.14% f.s. | ±0.6% rdg. ±0.2% f.s. |
| 10.000 A | ±0.6% rdg. ±0.3% f.s. | ±0.6% rdg. ±0.6% f.s. |
| 5.0000 A | ±0.6% rdg. ±0.5% f.s. | ±0.6% rdg. ±1.1% f.s. |

| Range | 9669 | |
|-----------|------------------------|--|
| 1.0000 kA | ±1.3% rdg. ±0.11% f.s. | |
| 200.00 A | ±1.3% rdg. ±0.15% f.s. | |
| 100.00 A | ±1.3% rdg. ±0.2% f.s. | |

| Range | CT9667 5.000 kA range | CT9667 500 A range |
|-----------|-----------------------|-----------------------|
| 5.0000 kA | ±2.3% rdg. ±0.4% f.s. | — |
| 500.00 A | — | ±2.3% rdg. ±0.4% f.s. |

Total display range

Voltage is displayed from 5 V to 1000 V, with less than 5 V displayed as 0 V.

Current is displayed from 0.4% to 130% of the selected range, with less than 0.4% displayed as 0 A

Power is displayed from 0 to 130% of full scale, with 0 W displayed when voltage or current is zero.

The range configurations for apparent power (S) and reactive power (Q) are the same, with units of [VA] and [var], respectively.

When VT and CT ratios are set, the range configuration is the product (VT ratio × CT ratio).

Effective measurement range


For voltage, 90 to 780 V, with max. 1400 V peak.

For current, 5% to 110% of the selected range with peak ±400% of range, but maximum range is ±200%.

For power, 5% to 110% of the selected range.

For frequency, 45 to 66 Hz.

Current Display and Effective Measurement Ranges (typical)

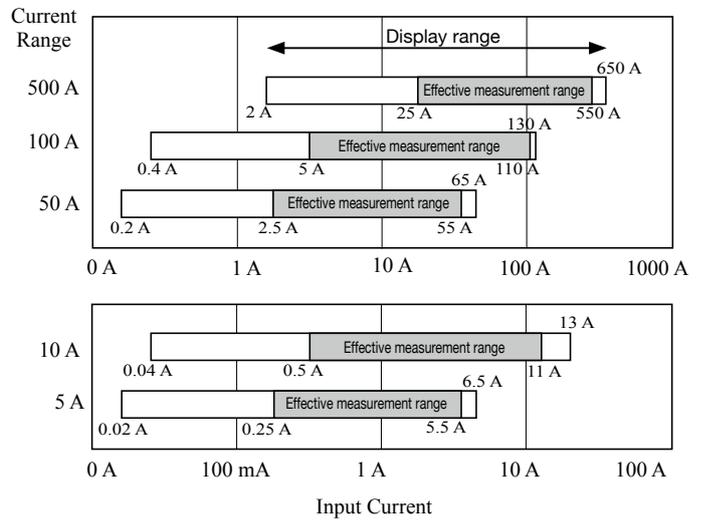

| | |
|--|--|
| Conditions of guaranteed accuracy | After 30 minute warm-up, with 50/60 Hz sine wave input |
| Temperature and humidity for guaranteed accuracy | 23°C ±5°C (73 ±9°F), 80%RH or less (applies to all specifications unless otherwise noted) |
| Display area of guaranteed accuracy | Effective measurement range |
| Period of guaranteed accuracy | 1 year |
| Real-time clock accuracy | Within ±0.3 sec/day (with power on, within specified operating temperature and humidity ranges) |
| Temperature characteristic | Within ±0.1% f.s./°C (except 23 ±5°C) |
| Effect of common mode voltage | Within ±0.2% f.s. (600 V AC, 50/60 Hz, between voltage input terminal and case) |
| Effect of external magnetic field | Within ±1.5% f.s. (in a magnetic field of 400 A/m rms AC, 50/60 Hz) |
| Effect of phase | Phase accuracy ±0.3° equivalent (with 50/60 Hz f.s. input) |
| Apparent power | ±1 dgt. for the calculation obtained from each measurement value |
| Reactive power | Fundamental waveform calculations ±0.3% rdg. ±0.1% f.s. + clamp-on sensor accuracy (w/power factor = 1) Rms calculations From each measurement applied to calculation ±1 dgt. |
| Energy | Active and reactive power measurement accuracies ±1 dgt. |
| Power factor | From each measurement applied to calculation ±1 dgt. |
| Frequency | ±0.5% rdg. (with 90 to 780 V sine wave input) |
| Demand value | Active and reactive power measurement accuracies ±1 dgt. |
| Demand quantity | Active and reactive power measurement accuracies ±1 dgt. |
| Pulse input | ±1 dgt. for the calculation obtained from each measurement value |
| Frequency characteristic | At 50/60 Hz fundamental waveform frequency, up to 1 kHz, ±3% rdg. ±0.2% f.s. up to 3kHz, ±10% rdg. ±0.2% f.s. For current and active power, add clamp-on sensor accuracy. Note: only for 3P3W3M wiring, add ±0.5% rdg. |

CLAMP ON POWER LOGGER PW3360-20



Accessories

VOLTAGE CORD L9438-53 (1 set), **AC ADAPTER Z1006** (1), USB cable (1), instruction manual (1), measurement guide (1), color spiral tubes (1 set): red, yellow, blue/two each, for color-coding clamp sensors, spiral tubes for grouping clamp sensor cords (5)

Clamp-On Power Logger PW3360-20 by itself does not support current and power measurements. Current and power measurements require clamp-on sensors, sold separately. Also, use only HIOKI-issued SD cards guaranteed to work for saving measurement data, (options, sold separately).

AC ADAPTER Z1006



VOLTAGE CORD L9438-53



cord length: 3m (9.84 ft)

1 cord each of black, red yellow, and blue, and five spiral tubes for bundling cords

Options

CLAMP ON SENSOR (for load current measurement)

- CLAMP ON SENSOR 9694 (AC5A)
 - CLAMP ON SENSOR 9660 (AC100A)
 - CLAMP ON SENSOR 9661 (AC500A)
 - CLAMP ON SENSOR 9669 (AC1000A)
 - FLEXIBLE CLAMP ON SENSOR CT9667 (AC5000A)
 - CLAMP ON SENSOR 9695-02 (AC50A)
 - CLAMP ON SENSOR 9695-03 (AC100A)
 - CONNECTION CORD 9219 (for connection to 9695-02, 9695-03)
- When purchasing the 9695-02 and 9695-03, we recommend also purchasing the separately sold 9219 Connection Cord.

CLAMP ON LEAK SENSOR (for leakage current measurement)


- CLAMP ON LEAK SENSOR 9657-10
- CLAMP ON LEAK SENSOR 9675

CLAMP ON ADAPTER

9290-10 MAX. 1500A AC (continuous: 1000A)



CAT III 600V
Cord length: 3m (9.84 ft)



Primary side
1000A

Secondary side
100A

Measurable conductor diameter

- φ55 mm (2.17in)
- Bus bar: ■ 80 mm (3.46in) × 20 mm (0.79 in)
- CT ratio: 10:1

SD MEMORY CARD 2GB

Z4001



Stores up to one year's data when acquired at one minute intervals. Performance cannot be guaranteed on storage media other than Hioki-specified SD card options.

VOLTAGE LINE POWER ADAPTER

PW9003


(supplies power from measurement lines)

Rated voltage: 240 V AC

Operating temperature and humidity range: -10 to 50°C, 80% RH or less



CAT III 300V

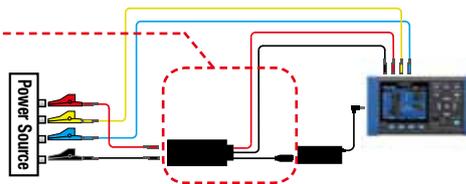

BATTERY SET

Battery Case and Battery Pack Set

PW9002



BATTERY PACK 9459

For purchase as replacement battery pack

CARRYING CASE

C1005



MAGNET ADAPTER

9804-01 Red



9804-02 Black


φ11mm (0.43 in)
(generally compatible with M6 pan screws)

Magnetic tip for use with the standard
VOLTAGE CORD L9438-53

Red and black adapters sold separately.
Purchase the quantity and color appropriate for your application.
(Example: 3P3W-3 adapters, 3P4W-4 adapters)

POWER LOGGER VIEWER

SF1001



LAN CABLE

9642



Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION:

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.:

TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED:

TEL +91-731-6548081 FAX +91-731-4020083
E-mail: info@hioki.in

HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info@hioki.com.sg

DISTRIBUTED BY

(주)누비콤
서울본사
서울특별시 영등포구 경인로 775(문래동 3가, 에이스하이테크시티 3동 201호)
TEL: 070-7872-0701 FAX: 02-2167-3801
E-mail: sales@nubicom.co.kr

고객지원센터
TEL: 070-7872-0701, 080-801-7880 FAX: 02-2167-3802
E-mail: oft@nubicom.co.kr

대전 사무소
대전광역시 유성구 대덕대로 593(도룡동 386-2) 대덕테크비즈센터 203호
TEL: 070-7872-0712 FAX: 042-863-2023
E-mail: inyeom@nubicom.co.kr