



SOUND LEVEL METER FT3432

Environmental measuring instruments



Convenient measurement of sound levels from electrical equipment and machinery



Highlights

- 1 IEC 61672-1 Class 2 and CE Mark compliant
- 2 Simple operation—no range switching needed
- 3 Compact, lightweight design for easy one-handed operation
- 4 Analog output



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091




www.hioki.com

HIOKI company overview, new products, environmental considerations and other information are available on our website.




Applications

- 1** Measurement of sound levels generated by high-voltage electrical transformers

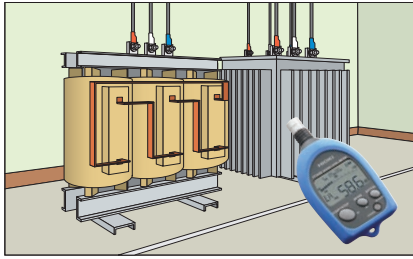


- 2** Measurement of lecture room noise

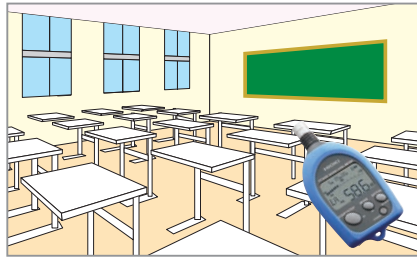

- 3** FFT analysis when connected to a MEMORY HiCORDER



Sound levels in everyday life

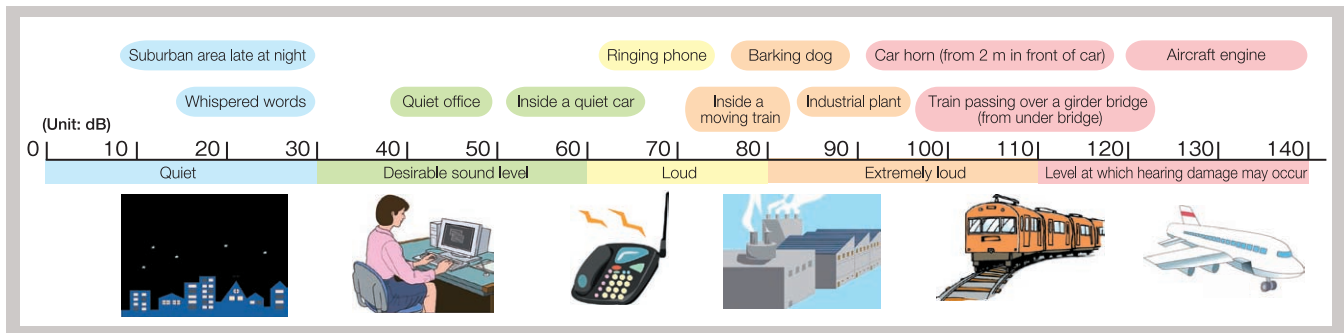

Specifications

Applicable standards	IEC 61672-1:2002 Class2, JIS C 1509-1:2005 Class2
Measurement functions	Sound level (Lp), Equivalent continuous sound level (Leq), Sound exposure level (LE), Maximum Sound level(Lmax), Cweighting peak sound level (LCpeak) (measurement possible only when peak range is selected)
Measurement times	1/5/10minutes, or 1hour
Microphone	1/2-inch electret condenser microphone Model:UC-52
Frequency weighting characteristics	A and C
Measurement level range	Wide range A weighting : 30 dB to 130 dB C weighting : 36 dB to 130 dB
Inherent noise level	Wide range A weighting : 24 dB or less C weighting : 30 dB or less
Measurement frequency range	20 Hz to 8000 Hz
Time weighting characteristics	F (fast) and S (slow)

Calibration	Electronic calibration using an internal electronic signal, sound calibration using NC-74
Processing	Digital Sampling interval 30.3 s (Lp, Leq, Lmax, LE, LCpeak)
Functions	Storing processing results (Storing capacity : 199 pieces of data), Warning indications, Bar graph
Output connector	DC output connector / AC monitor output connector
Power supply	LR03 alkaline batteryx2 or R03 manganese batteryx2
Continuous usage	Approx.9 hours (using alkaline batteries) Approx.3 hours (using manganese batteries)
Environmental conditions for operation	-10 to 50°C (14°F to 122°F), 10 to 90% RH (No condensation)
Dimensions, mass	63W×120H×23.5Dmm (2.48" W×4.72" H×0.93"D), 105g (3.7oz.) (including batteries)
Accessories	Wind screen WS-14, Hand strap VM-63-017, Windscreen fall out prevention rubber NL-27-014, Silicon cover NL-27-026, Carrying Case 9757, LR03 alkaline batteriesx2, Instruction Manual

Options

AC monitor output cable CC-98A

DC output cable CC-98D CC-98A / CC-98D




Tripod ST-80

Extension Rod ST-80-100



ST-80



HIOKI

HIOKI E. E. CORPORATION

HEAD OFFICE :
81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 / FAX +81-268-28-0568
E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :
6 Corporate Drive, Cranbury, NJ 08512 USA
TEL +1-609-409-9109 / FAX +1-609-409-9108
E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :
1608-1610 Shanghai Times Square Office, 93 Huai Hai Zhong
Road, Shanghai, P.R.China POSTCODE: 200021
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360
E-mail: info-sh@hioki.com.cn
Beijing Office :
A-2602 Freetown, 58 Dong San Huan Nan Road
Beijing, P.R.China POSTCODE: 100022
TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090
E-mail: info-bj@hioki.com.cn
Guangzhou Office :
Room A-3206, Victory Plaza Services Center, No.103,
Tiyuxi Road, Guangzhou, P.R.China POSTCODE:510620
TEL +86-20-38392673/2676 FAX +86-20-38392679
E-mail: info-gz@hioki.com.cn

DISTRIBUTED BY

(주)누빅콤

서울지사
서울특별시 영등포구 경인로 775(문래동 3가, 에이스하이테크시티 3동 201호)
TEL: 070-7872-0701 FAX: 02-2167-3801
E-mail: sales@nubicom.co.kr

고객지원센터
TEL: 070-7872-0701, 080-801-7880 FAX: 02-2167-3802
E-mail: ofc@nubicom.co.kr

대전 사무소
대전광역시 유성구 대덕대로 593(도룡동 386-2) 대덕테크비즈니스센터 203호
TEL: 070-7872-0712 FAX: 042-863-2023
E-mail: inyeom@nubicom.co.kr