

R&S® RSC Step Attenuator Specifications



CONTENTS

| | |
|---------------------------------------------------------------------------------|----------|
| Definitions | 3 |
| Specifications | 4 |
| Step attenuator, 139 dB, 1 dB steps, DC to 6 GHz (models .03 and .13) | 4 |
| Step attenuator, 139.9 dB, 0.1 dB steps, DC to 6 GHz (models .04 and .14) | 4 |
| Step attenuator, 115 dB, 5 dB steps, DC to 18 GHz (models .05 and .15) | 5 |
| External step attenuator, 75 dB, 5 dB steps, DC to 40 GHz (R&S®RSC-Z405) | 5 |
| External step attenuator, 75 dB, 5 dB steps, DC to 67 GHz (R&S®RSC-Z675) | 6 |
| Control function | 6 |
| General data | 7 |
| Ordering information | 8 |

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

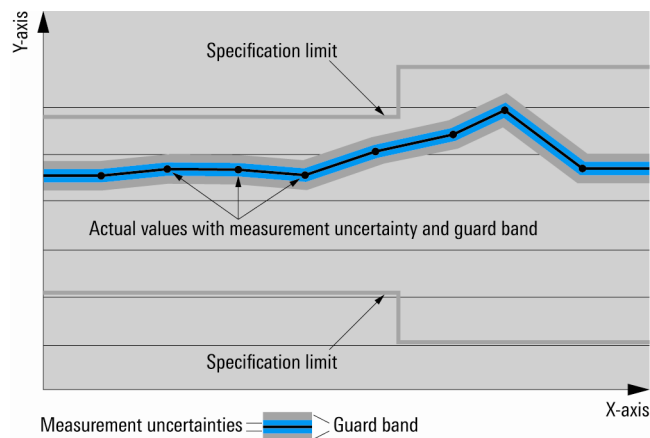

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

Step attenuator, 139 dB, 1 dB steps, DC to 6 GHz (models .03 and .13)

| | | |
|--------------------------------------------------------|--------------------|------------------------------------------------|
| Impedance | | 50 Ω |
| RF connector | | N female |
| Frequency range | | DC to 6 GHz |
| Attenuation range | | 0 dB to 139 dB |
| Attenuation steps | | 1 dB |
| Return loss | DC to 1 GHz | > 20 dB |
| | 1 GHz to 3 GHz | > 15 dB |
| | 3 GHz to 6 GHz | > 10 dB |
| Attenuation in 0 dB position | DC to 1 GHz | < 1 dB |
| | 1 GHz to 4 GHz | < 1.5 dB |
| | 4 GHz to 6 GHz | < 2 dB |
| Attenuation uncertainty (relative to 0 dB position) | DC to 1 GHz | < 0.2 dB + 1 % of attenuation value |
| | 1 GHz to 3 GHz | < 0.4 dB + 1 % of attenuation value |
| | 3 GHz to 6 GHz | < 0.6 dB + 1.3 % of attenuation value |
| Repeatability | | 0.02 dB (typ.) |
| Correction data frequency spacing | | 50 MHz |
| Maximum power-handling capability | continuous wave | 1 W |
| | pulse < 10 μ s | 200 W |
| Maximum voltage | pulse < 10 μ s | 150 V |
| Life | | > 10 \times 10 ⁶ switching cycles |
| Switching time | | < 25 ms |

Step attenuator, 139.9 dB, 0.1 dB steps, DC to 6 GHz (models .04 and .14)

| | | |
|------------------------------------------------------------------------------|--------------------|------------------------------------------------|
| Impedance | | 50 Ω |
| RF connector | | N female |
| Frequency range | | DC to 6 GHz |
| Attenuation range | | 0 dB to 139.9 dB |
| Attenuation steps | 1 dB to 139.9 dB | 0.1 dB |
| Return loss | DC to 1 GHz | > 20 dB |
| | 1 GHz to 3 GHz | > 12 dB |
| | 3 GHz to 6 GHz | > 10 dB |
| Attenuation in 0 dB position | DC to 1 GHz | < 1 dB |
| | 1 GHz to 3 GHz | < 1.5 dB |
| | 3 GHz to 6 GHz | < 2.2 dB |
| Attenuation uncertainty without correction (relative to 0 dB position) | DC to 1 GHz | < 0.2 dB + 1 % of attenuation value |
| | 1 GHz to 2 GHz | < 0.4 dB + 1 % of attenuation value |
| | 2 GHz to 6 GHz | < 0.6 dB + 1.3 % of attenuation value |
| Attenuation uncertainty with correction (relative to 0 dB position, typ.) | DC to 1 GHz | < 0.07 dB + 0.5 % of attenuation value |
| | 1 GHz to 2 GHz | < 0.12 dB + 0.5 % of attenuation value |
| | 2 GHz to 6 GHz | < 0.17 dB + 1 % of attenuation value |
| Repeatability | | 0.02 dB (typ.) |
| Correction data frequency spacing | | 50 MHz |
| Maximum power-handling capability | continuous wave | 1 W |
| | pulse < 10 μ s | 200 W |
| Maximum voltage | pulse < 10 μ s | 150 V |
| Life | | > 10 \times 10 ⁶ switching cycles |
| Switching time | | < 25 ms |

Step attenuator, 115 dB, 5 dB steps, DC to 18 GHz (models .05 and .15)

| | | |
|--------------------------------------------------------|--------------------|-----------------------------------------------|
| Impedance | | 50 Ω |
| RF connector | | N female |
| Frequency range | | DC to 18 GHz |
| Attenuation range | | 0 dB to 115 dB |
| Attenuation steps | | 5 dB |
| Return loss | DC to 2 GHz | > 20 dB |
| | 2 GHz to 18 GHz | > 15 dB |
| Attenuation in 0 dB position | DC to 5 GHz | < 2.0 dB |
| | 5 GHz to 10 GHz | < 2.5 dB |
| | 10 GHz to 18 GHz | < 3.5 dB |
| Attenuation uncertainty (relative to 0 dB position) | DC to 5 GHz | < 0.6 dB + 1 % of attenuation value |
| | 5 GHz to 10 GHz | < 1.0 dB + 1 % of attenuation value |
| | 10 GHz to 18 GHz | < 1.0 dB + 1.3 % of attenuation value |
| Repeatability | | 0.02 dB (typ.) |
| Correction data frequency spacing | | 100 MHz |
| Maximum power-handling capability | continuous wave | 1 W |
| | pulse < 10 μ s | 200 W |
| Maximum voltage | pulse < 10 μ s | 150 V |
| Life | | > 1 \times 10 ⁶ switching cycles |
| Switching time | | < 30 ms |

External step attenuator, 75 dB, 5 dB steps, DC to 40 GHz (R&S[®] RSC-Z405)

| | | |
|----------------------------------------------------------------------------|--------------------|-----------------------------------------------|
| Impedance | | 50 Ω |
| RF connector | | 2.92 mm female |
| Frequency range | | DC to 40 GHz |
| Attenuation range | | 0 dB to 75 dB |
| Attenuation steps | | 5 dB |
| Return loss | DC to 5 GHz | > 20 dB |
| | 5 GHz to 20 GHz | > 15 dB |
| | 20 GHz to 40 GHz | > 12 dB |
| Attenuation in 0 dB position | DC to 5 GHz | < 1.5 dB |
| | 5 GHz to 20 GHz | < 2.5 dB |
| | 20 GHz to 40 GHz | < 3.5 dB |
| Attenuation uncertainty from 5 dB to 35 dB (relative to 0 dB position) | DC to 10 GHz | < 0.5 dB |
| | 10 GHz to 20 GHz | < 0.8 dB |
| | 20 GHz to 40 GHz | < 1.5 dB |
| Attenuation uncertainty from 40 dB to 75 dB (relative to 0 dB position) | DC to 10 GHz | < 1.0 dB |
| | 10 GHz to 20 GHz | < 2.0 dB |
| | 20 GHz to 40 GHz | < 4.0 dB |
| Repeatability | | 0.02 dB (typ.) |
| Correction data frequency spacing | | 100 MHz |
| Maximum power-handling capability | continuous wave | 1 W |
| | pulse < 10 μ s | 200 W |
| Maximum voltage | pulse < 10 μ s | 150 V |
| Life | | > 1 \times 10 ⁶ switching cycles |
| Switching time | | < 30 ms |

External step attenuator, 75 dB, 5 dB steps, DC to 67 GHz (R&S® RSC-Z675)

| | | |
|----------------------------------------------------------------------------|--------------------|------------------------------------|
| Impedance | | 50 Ω |
| RF connector | | 1.85 mm female |
| Frequency range | | DC to 67 GHz |
| Attenuation range | | 0 dB to 75 dB |
| Attenuation steps | | 5 dB |
| Return loss | DC to 5 GHz | > 20 dB |
| | 5 GHz to 20 GHz | > 15 dB |
| | 20 GHz to 40 GHz | > 12 dB |
| | 40 GHz to 60 GHz | > 8 dB |
| | 60 GHz to 67 GHz | > 6 dB |
| Attenuation in 0 dB position | DC to 5 GHz | < 1.5 dB |
| | 5 GHz to 20 GHz | < 2.5 dB |
| | 20 GHz to 40 GHz | < 3.5 dB |
| | 40 GHz to 60 GHz | < 4.5 dB |
| | 60 GHz to 67 GHz | < 5.0 dB |
| Attenuation uncertainty from 5 dB to 35 dB (relative to 0 dB position) | DC to 10 GHz | < 0.5 dB |
| | 10 GHz to 20 GHz | < 0.8 dB |
| | 20 GHz to 40 GHz | < 1.5 dB |
| | 40 GHz to 60 GHz | < 2.0 dB |
| | 60 GHz to 67 GHz | < 3.0 dB |
| Attenuation uncertainty from 40 dB to 75 dB (relative to 0 dB position) | DC to 10 GHz | < 1.0 dB |
| | 10 GHz to 20 GHz | < 2.0 dB |
| | 20 GHz to 40 GHz | < 4.0 dB |
| | 40 GHz to 60 GHz | < 5.0 dB |
| | 60 GHz to 67 GHz | < 6.0 dB |
| Repeatability | | 0.02 dB (typ.) |
| Correction data frequency spacing | | 100 MHz |
| Maximum power-handling capability | continuous wave | 1 W |
| | pulse < 10 μ s | 200 W |
| Maximum voltage | pulse < 10 μ s | 150 V |
| Life | | > 1×10^6 switching cycles |
| Switching time | | < 30 ms |

Control function

| | | |
|----------------------------------------|-----------------------------------------|---------------------------------|
| Control of external attenuators | interface | USB with 12 V supply voltage |
| | connector | round connector 5 pins |
| | number of controllable step attenuators | 4 |
| | max. power at control output | 8 W |
| Remote control | command set | SCIP1 1997.0 |
| | IEC/IEEE bus | in line with IEC 625-1/IEEE 488 |
| | LAN | 10/100BaseT, RJ-45 |
| | USB | USB type B |

General data

| | | |
|----------------------------------|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature loading | in line with IEC 60068-2-1 and IEC 60068-2-2 | |
| | operating temperature range | 0 °C to +55 °C |
| | permissible temperature range | 0 °C to +55 °C |
| | storage temperature range | -40 °C to +70 °C |
| Damp heat | | +40 °C at 80 % rel. humidity, in line with IEC 60068-2-30 |
| Mechanical resistance | vibration, sinusoidal | IEC 60068-2-6 |
| | vibration, random | IEC 60068-2-64 |
| | shock | 40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4 procedure I |
| Recommended calibration interval | | 2 years |
| EMC | | EMC Directive 2004/108/EC including: <ul style="list-style-type: none"> • IEC/EN 61326 class B (emission) • IEC/EN 61326 Table A.1 (immunity, industrial) |
| Safety | | in line with IEC 61010-1, EN 61010-1 and UL 3111-1 |
| Power supply | | 100 V to 240 V 50 Hz to 60 Hz, 75 VA |
| Power consumption | no switching operation | 10 W |
| | with 4 attenuators switching | max. 40 W |
| Test mark | | VDE, GS, CSA, CSA-NRTL/C, CE conformity mark |
| Dimensions (W × H × D) | R&S®RSC | 250 mm × 117 mm × 395 mm (9.84 in × 4.6 in × 15.55 in) |
| Weight | model .02 | 3.4 kg (7.5 lb) |
| | models .03, .13, .05 and .15 | 3.9 kg (8.6 lb) |
| | models .04 and .14 | 4.4 kg (9.7 lb) |

Ordering information

| Designation | Type | Order No. |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| Step Attenuator, control of external step attenuators (without integrated attenuator) | R&S®RSC | 1313.8004.02 |
| Step Attenuator, 0 dB to 139 dB, 1 dB steps, DC to 6 GHz, control of external step attenuators, N(f) connectors at front panel | R&S®RSC | 1313.8004.03 |
| Step Attenuator, 0 dB to 139 dB, 1 dB steps, DC to 6 GHz, control of external step attenuators, N(f) connectors at rear panel | R&S®RSC | 1313.8004.13 |
| Step Attenuator, 0 dB to 139.9 dB, 0.1 dB steps, DC to 6 GHz, control of external step attenuators, N(f) connectors at front panel | R&S®RSC | 1313.8004.04 |
| Step Attenuator, 0 dB to 139.9 dB, 0.1 dB steps, DC to 6 GHz, control of external step attenuators, N(f) connectors at rear panel | R&S®RSC | 1313.8004.14 |
| Step Attenuator, 0 dB to 115 dB, 5 dB steps, DC to 18 GHz, control of external step attenuators, N(f) connectors at front panel | R&S®RSC | 1313.8004.05 |
| Step Attenuator, 0 dB to 115 dB, 5 dB steps, DC to 18 GHz, control of external step attenuators, N(f) connectors at rear panel | R&S®RSC | 1313.8004.15 |
| External step attenuator, 0 dB to 75 dB, 5 dB steps, DC to 40 GHz, controllable by R&S®RSC ¹ | R&S®RSC-Z405 | 1313.9952.02 |
| External step attenuator, 0 dB to 75 dB, 5 dB steps, DC to 67 GHz, controllable by R&S®RSC ¹ | R&S®RSC-Z675 | 1314.0065.02 |
| Control Cable, for connecting an external step attenuator to the R&S®RSC | R&S®RSC-Z41 | 1314.0136.02 |
| Control Cable, for connecting an external step attenuator to a PC | R&S®RSC-Z42 | 1314.0142.02 |

| Service options | | |
|----------------------------------------------------------|------------|---------------------------------------------------------|
| Extended Warranty, one year | R&S®WE1RSC | Please contact your local Rohde & Schwarz sales office. |
| Extended Warranty, two years | R&S®WE2RSC | |
| Extended Warranty, three years | R&S®WE3RSC | |
| Extended Warranty, four years | R&S®WE4RSC | |
| Extended Warranty with Calibration Coverage, one year | R&S®CW1RSC | |
| Extended Warranty with Calibration Coverage, two years | R&S®CW2RSC | |
| Extended Warranty with Calibration Coverage, three years | R&S®CW3RSC | |
| Extended Warranty with Calibration Coverage, four years | R&S®CW4RSC | |

Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge². Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs² and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

For product brochure, see PD 5214.4413.12 and www.rohde-schwarz.com

¹ Does not include the R&S®RSC-Z41 or R&S®RSC-Z42 control cable.

² Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service you can rely on

- ▮ Worldwide
- ▮ Local and personalized
- ▮ Customized and flexible
- ▮ Uncompromising quality
- ▮ Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- ▮ Energy-efficient products
- ▮ Continuous improvement in environmental sustainability
- ▮ ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- ▮ Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- ▮ North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- ▮ Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- ▮ Asia/Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- ▮ China | +86 800 810 8228/+86 400 650 5896
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (ch)
PD 5214.4413.22 | Version 04.00 | December 2012 | R&S®RSC

Subject to change

© 2011 - 2012 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214441322